

MSD-V6 Modular Audio

MSD-VAB4D

The MSD-VAB4D is a modular Dante audio option that is a factory-installed and supports up to four (4) input and four (4) output audio signals. Stereo pairs (left and right audio channels) can be transmitted to two (2) inputs and two (2) outputs, respectively. The Dante audio output can be switched together with video switching. Multichannel audio is downmixed and output as Dante signals. Dante audio inputs can be embedded over HDMI and then de-embedded as an analog audio output.


■ Specification

		MSD-VAB4D
Audio input/ output	Dante	1 input/output Dante Up to 4 input channels, Up to 4 output channels Sampling frequency: 44.1/48/88.2*/96 kHz* Reference level: -20 dBFS, Max. input/output level: 0 dBFS Connector: RJ-45 Maximum distance: 328 ft. (100 m) Cable: CAT.5E HDC, CAT5e (UTP/STP), CAT6 (UTP/STP), CAT6A (UTP/STP)

*Dante channel: two (2) inputs/two (2) outputs.

■ Front & Rear Panels

MSD-V62UC with MSD-VIV1UC and MSD-VAB4D (Option)

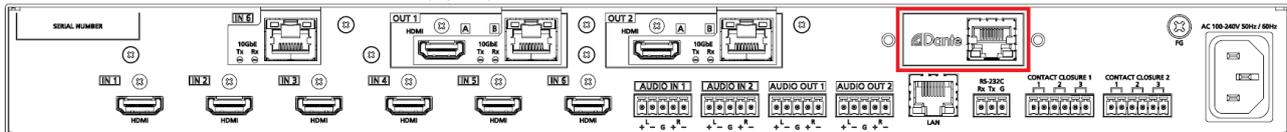

●All specifications and drawings are subject to change without notice. ●HDBaseT™ and the HDBaseT Alliance Logo are trademarks of the HDBaseT Alliance. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●SDVoE™ and SDVoE logo are trademarks of SDVoE Alliance. ●Audinate® is a registered trademark of Audinate Pty Ltd. Dante® is a registered trademark of Audinate Pty Ltd. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the "®" or "™" marks may not be specified. ●©2023 IDK Corporation, all rights reserved.